

ILLUMINATION

ML Series Fluorescent Light Panels

HIGH-FREQUENCY (25 KHZ)

FEATURES:

- White (daylight), uniform backlighting
- High-frequency electronic ballast provides efficient, flicker-free illumination
- Low profile package for use in tight spaces
- Replaceable lamps
- Various sizes available
- Ideal for use in a variety of imaging applications
- Tabletop or wall mounting capabilities



StockerYale's fluorescent light panels are versatile backlight panels that provide uniform, flicker-free illumination across a variety of viewing areas. They are an ideal solution in machine vision applications, as well as applications involving film and paper examination, frame grabbing and process inspection. Their low profile enables them to be placed in tight spaces, on assembly lines, or under conveyor belts during in-process inspection.

The fluorescent light panels utilize replaceable, specialty T5 fluorescent lamps that offer high-output, deluxe daylight (5000K) illumination. The fluorescent lamps provide 7,000 hours of uniform lighting across the entire viewing area. Panels are available with either an 8" x 18" (460 x 205mm) or 12" x 18" (460 x 305mm) viewing area. These lamps are driven by high-frequency (25kHz) electronic ballasts to provide flicker-free illumination that is ideal for a variety of imaging applications. These units are supplied complete with a 24VDC adapter with universal voltage input (100-240VAC).


TECHNICAL SPECIFICATIONS

MODEL NUMBER:	ML-0818	ML-1218
Input Voltage (AC Adapter):	90-250 VAC	90-250 VAC
Output Voltage (AC Adapter):	24 VDC; 1A (supplied with IEC cable)	24 VDC; 2A (supplied with IEC cable)
Operating Frequency:	25 kHz	25 kHz
Lamp Type*:	(2) F13T5 (modified)	(2) F13T5 (modified)
Color Temperature:	5000K	5000K
Lamp Life:	7,000 hours	7,000 hours
Operating Temperature:	41 to 131°F (5 to 55°C)	41 to 131°F (5 to 55°C)
Weight:	6.61 lbs. (3 kgs.)	9.5 lbs. (4.31 kgs.)

* Specialty T5 replacement lamps are available from factory.

DIMENSIONS

	ML-0818	ML-1218
A	11.93" (303mm)	15.94" (405mm)
B	8.07" (205mm)	12.01" (305mm)
C	21.65" (550mm)	21.65" (550mm)
D	18.11" (460mm)	18.11" (460mm)
E	1.18" (30mm)	1.18" (30mm)

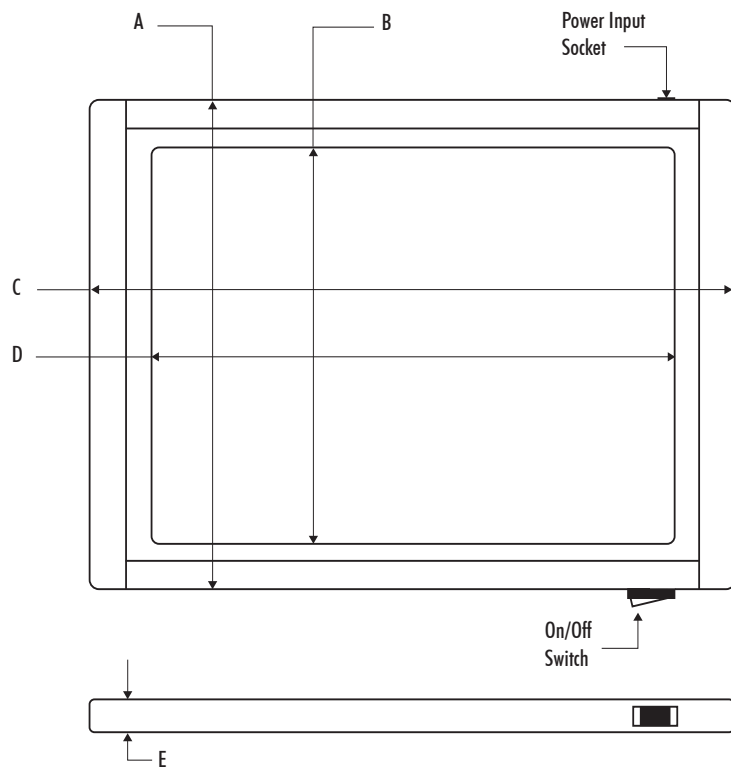

Corporate Headquarters
 32 Hampshire Road
 Salem, New Hampshire 03079 USA
800-843-8011
 603-893-8778 Fax: 603-893-5604
 sales@stockeryale.com
 www.stockeryale.com

StockerYale and the StockerYale logo are trademarks of StockerYale, Inc. All other brand and product names are trademarks or registered trademarks of their respective holders.

Copyright © May 2009 StockerYale, Inc. Printed in the USA
 All rights reserved. DSM_Fluo_ML_R03