




SpecBright™ LED Ring Light Part Number Matrix

R E 2 - 470 - V X C 100

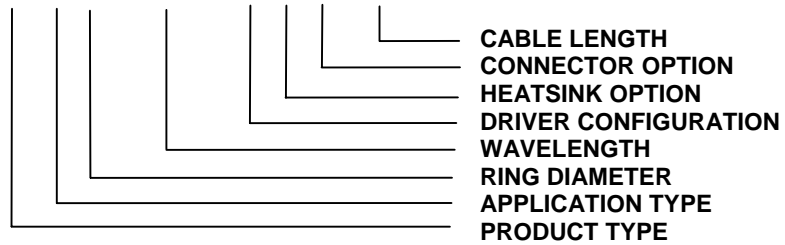

PRODUCT TYPE:	R	RING LIGHT SERIES
APPLICATION TYPE:	F	FRONT LIGHT APPLICATION
RING DIAMETER:	1 2	ø2.00" (ø50.8mm) OUTSIDE DIAMETER ø2.79" (ø70.8mm) OUTSIDE DIAMETER
WAVELENGTH:	470 630 740 000	BLUE, 470nm RED, 630nm IR, 740nm WHITE, 6700K
DRIVER CONFIGURATION:	V I	VOLTAGE DRIVEN, CURRENT LIMITED CONFIGURED FOR PULSED OPERATION
HEATSINK OPTION:	X H	NO HEATSINK SUPPLIED, MODULE ONLY SUPPLIED WITH MATING HEATSINK
CONNECTOR OPTION:	F C	SUPPLIED WITH FLYING LEADS ONLY SUPPLIED WITH CONNECTOR
CABLE LENGTH (CM):	100	100CM LONG (standard)

* Please note that power supplies and current mode controllers are sold separately.